
ACCO-Ahmed Construction Company

Calculations

PROJECT DATA
Plot Area: 37,180 sft
Allowed Coverage (Basement–3rd): 70%
Covered Area per Floor: 26,026 sft
Circulation per Floor (20%): 5,205 sft
Net Usable Area per Floor: 20,821 sft

Floor-wise table

Floor	Coverage rule assumed	Covered area (sft)
Basement	70% of plot	**26,026**
Ground	70%	**26,026**
1st	70%	**26,026**
2nd	70%	**26,026**
3rd	70%	**26,026**
Total		**141,284 sft**

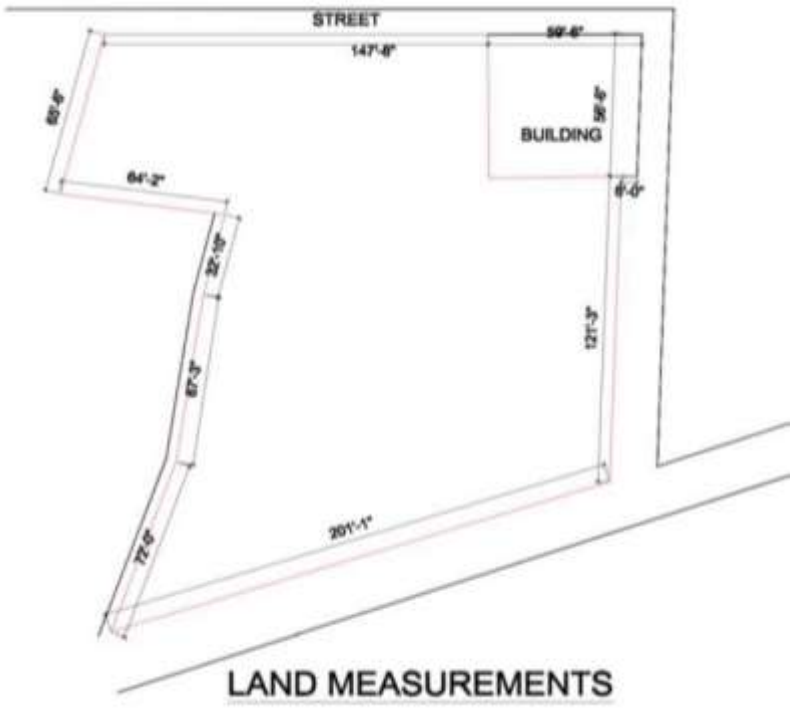

BASEMENT FLOOR
Total Area: 26,026 sft
Radiology (CT, MRI, X-Ray, Control, Stores) (35%): 9,109 sft
Parking & Circulation (65%): 16,917 sft

GROUND FLOOR
Covered Area: 26,026 sft
Circulation (20%): 5,205 sft
Net Usable: 20,821 sft
Reception & Waiting: 4,000 sft
Diagnostic Lab: 2,500 sft
Bank / Billing / ATM: 5,500 sft
Doctors Cabins (20 x 300): 5,850 sft
Toilets & Support: 2,821 sft

FIRST FLOOR – OPD
Covered Area: 26,026 sft
Circulation (20%): 5,205 sft
Net Usable: 20,821 sft
Doctors Cabins (45 x 300): 13,500 sft
Waiting & Reception: 3,500 sft
Nurse & Support Areas: 3,821 sft

SECOND FLOOR – WARDS
Covered Area: 26,026 sft
Circulation (20%): 5,205 sft
Net Usable: 20,821 sft
Room Size: 10'x12' (120 sft) + Toilet 5'x8' (40 sft)
Total Beds: 64
Male Ward: 25 Beds
Female Ward: 25 Beds
Private Rooms: 10 Beds
Isolation: 4 Beds
Support Areas: Nurse Stations, Utilities, Stores

THIRD FLOOR – OT & LABOUR
Covered Area: 26,026 sft
Circulation (20%): 5,205 sft
Net Usable: 20,821 sft
Operation Theatres: 4 (18'x20')
Pre-op, Post-op & Recovery Included
Labor Rooms: 4
Delivery Rooms: 2
Nursery / NICU Included
Clean & Dirty Corridors including: 6,081 sft

SUMMARY
All floors planned with 20% circulation

Planning suitable for Wah Cantt / Pakistan Hospital Standard