Outlook

RFQ-Fauji Foods Limited-Filling Machine PU Panel Room with Ventilation System (Turnkey Solution)

From Hamza Riaz <hamza.riaz@faujifoods.com>
Date Thu 2/12/2026 11:21 PM
Cc Hamza Khizar <hamza.khizar@faujifoods.com>

1 attachment (320 KB)
FFFL Filling Machine Layout.dwg-Model.pdf;

Dear Vendor,

Requesting you to please share a quote for the following items listed in the below table:
We request you to submit a proposal for the Filling Machine PU Panel Room, including a ventilation system with positive pressure relative to adjacent areas to prevent contamination.

Scope of Work – Filling Machine PU Panel Room and Ventilation (for Hygiene Air Supply):

1. Supply and installation of PU panels as per requirement and attached layout.
    - Required room temperature: 8–10 °C (purple-marked area).
    - Green-marked area is already installed, as shown in the layout.
2. Supply and installation of hard area barricading before start of work, including complete end-to-end sealing using parachute material.
3. Removal of corrugated sheets from the roof side shall be in the scope of the supplier.
4. All accessories for fixing PU panels (roof, walls, and bottom) shall be in the scope of the supplier.
5. SS 304L angle (6” × 6” × 1.5 mm thickness) to be installed all around at the bottom of all PU panels.
6. L-type profiling between wall and roof shall be in the scope of the supplier.
7. All doors and windows, as mentioned in the layout, including all accessories, shall be in the scope of the supplier.
8. Removal and re-fixing of already installed roof lights shall be in the scope of the supplier.
9. All height arrangements and material rigging shall be in the scope of the supplier.
10. Proper roof sealing and closure of all gaps shall be in the scope of the supplier.
11. Supply, design, and installation of ventilation system with HEPA filtration to provide hygienic air and maintain positive air pressure of 5 Pa relative to adjacent areas.
12. The proposal shall consider the existing 02 evaporators (-42 °C and -6 °C, ammonia-based) already available at the FFFL plant site. These must be integrated into the ventilation/conditioning design to maintain the 8–10 °C room temperature.
13. All ducting inside the room must be of SS 304L material.
14. Fans used for positive air pressure must be fitted with SS 304L mesh and louvers.
15. All electrical equipment, including cables (FAST, Pakistan only), SS 304 cable trays, and SS 304 meshes, including supply and installation, shall be in the scope of the supplier.

16. Any DBs and breakers required must be Schneider (European region only), housed in SS 304L enclosures with IP-55 rating to maintain hygienic conditions.
17. Supply and installation of 20 No's damp-proof lights with specifications below, along with isolators and accessories:

- Isolators: Socomec metal body, IP-55 (Qty: 5)
- Junction boxes: Hensel (QTY: 10)
- Cables: FAST, Pakistan
- PVC conduit pipes as required
- PG Glands: Onka

Damp Proof Light Specification:

- Brand/Series: Endure
- Power: 40W
- CCT: 6500K (5700K), CRI: Ra80
- Model: DPL-ENDP-1221-40-6580-120-ND
- Beam Angle: 120°
- Dimensions: L 1221 × W 74 × H 64 mm

Notes:

- Vendor must visit the site before submission of the proposal.
- Safety PPEs shall be in the scope of the supplier.
- All rigging and crane requirements shall be in the scope of the supplier.
- All height arrangements shall be in the scope of the supplier.
- A site and safety supervisor must be part of the supplier's team.
- Temporary lighting and DB arrangements for work shall be in the scope of the supplier.

Boarding and lodging shall be in the scope of the supplier.

Item Description	Quantity	UOM
PU Sandwich Panel 4" (100mm)	8,943	FT2
Assembling of panels 4" 100 mm	8,943	FT2
Sliding door 2.5M x 2.4M	2	NO
Sliding door 1.8 M x 2.4M	1	NO
Hinged door 818.5 mm x 1930 mm	1	NO
PU window 836.6 mm x 836.6 mm	2	NO
PU window 350 mm x 350 mm	2	NO
SS angle 6" × 6" × 1.5 mm thk	788	KG


Sr. No.	Description	UOM	Quantity
1	Polyurethane Sandwich Panel 4" (100mm), CFC-Free, foamed in-place. Internal and external surface of hot-dip galvanized steel sheet, pre-painted polyester coating.	SFT	8,943
2	Assembling of panels 4" (100 mm), Inclusive of fitment of profiles, filling and caulking of silicon and pressure relief ports.	SFT	8,943
3	Supply and installation of sliding door for the opening size of : 2.5M x 2.4M (high) complete with door frame, door hardware, side rail, & gasket with one hinged door (900x1900) and double galzed sight window (1' x 1.5') (Thickness 4") Provision for door frame heater	Nos.	2
4	Supply and installation of sliding door for the opening size of : 1.8 M x 2.4M (high) complete with door frame, door hardware, side rail, & gasket with one hinged door (900x1900) and double galzed sight window (1' x 1.5') (Thickness 4") Provision for door frame heater	Nos.	1
5	Supply and installation of hinged doors and door frame 818.5 mm x 1930 mm equipped with heavy duty hinges, lock with internal safety release.& panic bar etc (Thickness 4") Emergency Exit Door	Nos.	1
6	Supply and installation of window of the size of: 836.6 mm x 836.6 mm	Nos.	2
7	Supply and installation of window of the size of: 350 mm x 350 mm	Nos.	2
8	SS 304L angle (6" × 6" × 1.5 mm thickness) to be installed all around at the bottom of all PU panels. (700 RFT)	KG	788
9	Labor and Transportation Charges	Nos.	1
10	Dismantling of Insulated Panels Total ft^2 = 1798 ft^2 & 20 lights	Nos.	1
11	Supply and installation of hard area barricading before start of work, including complete end-to-end sealing using parachute material.Folding for Removal of already installed panels. All height arrangements and material rigging.	Units	1

Best Regards,


HAMZA RIAZ
Procurement Executive
Fauji Foods Limited
42 CCA, Ex Park View, DHA Phase 8
Lahore,Pakistan
Contact No. : +92-3268323523

Confidentiality Notice: This email and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed. If you have received this email in error, please notify the system manager. Any views or opinions presented in this email are solely those of the author and do not necessarily represent those of the company. The recipient should check this

email and any attachments for the presence of viruses. The company accepts no liability for any damage caused by any virus transmitted by this email.

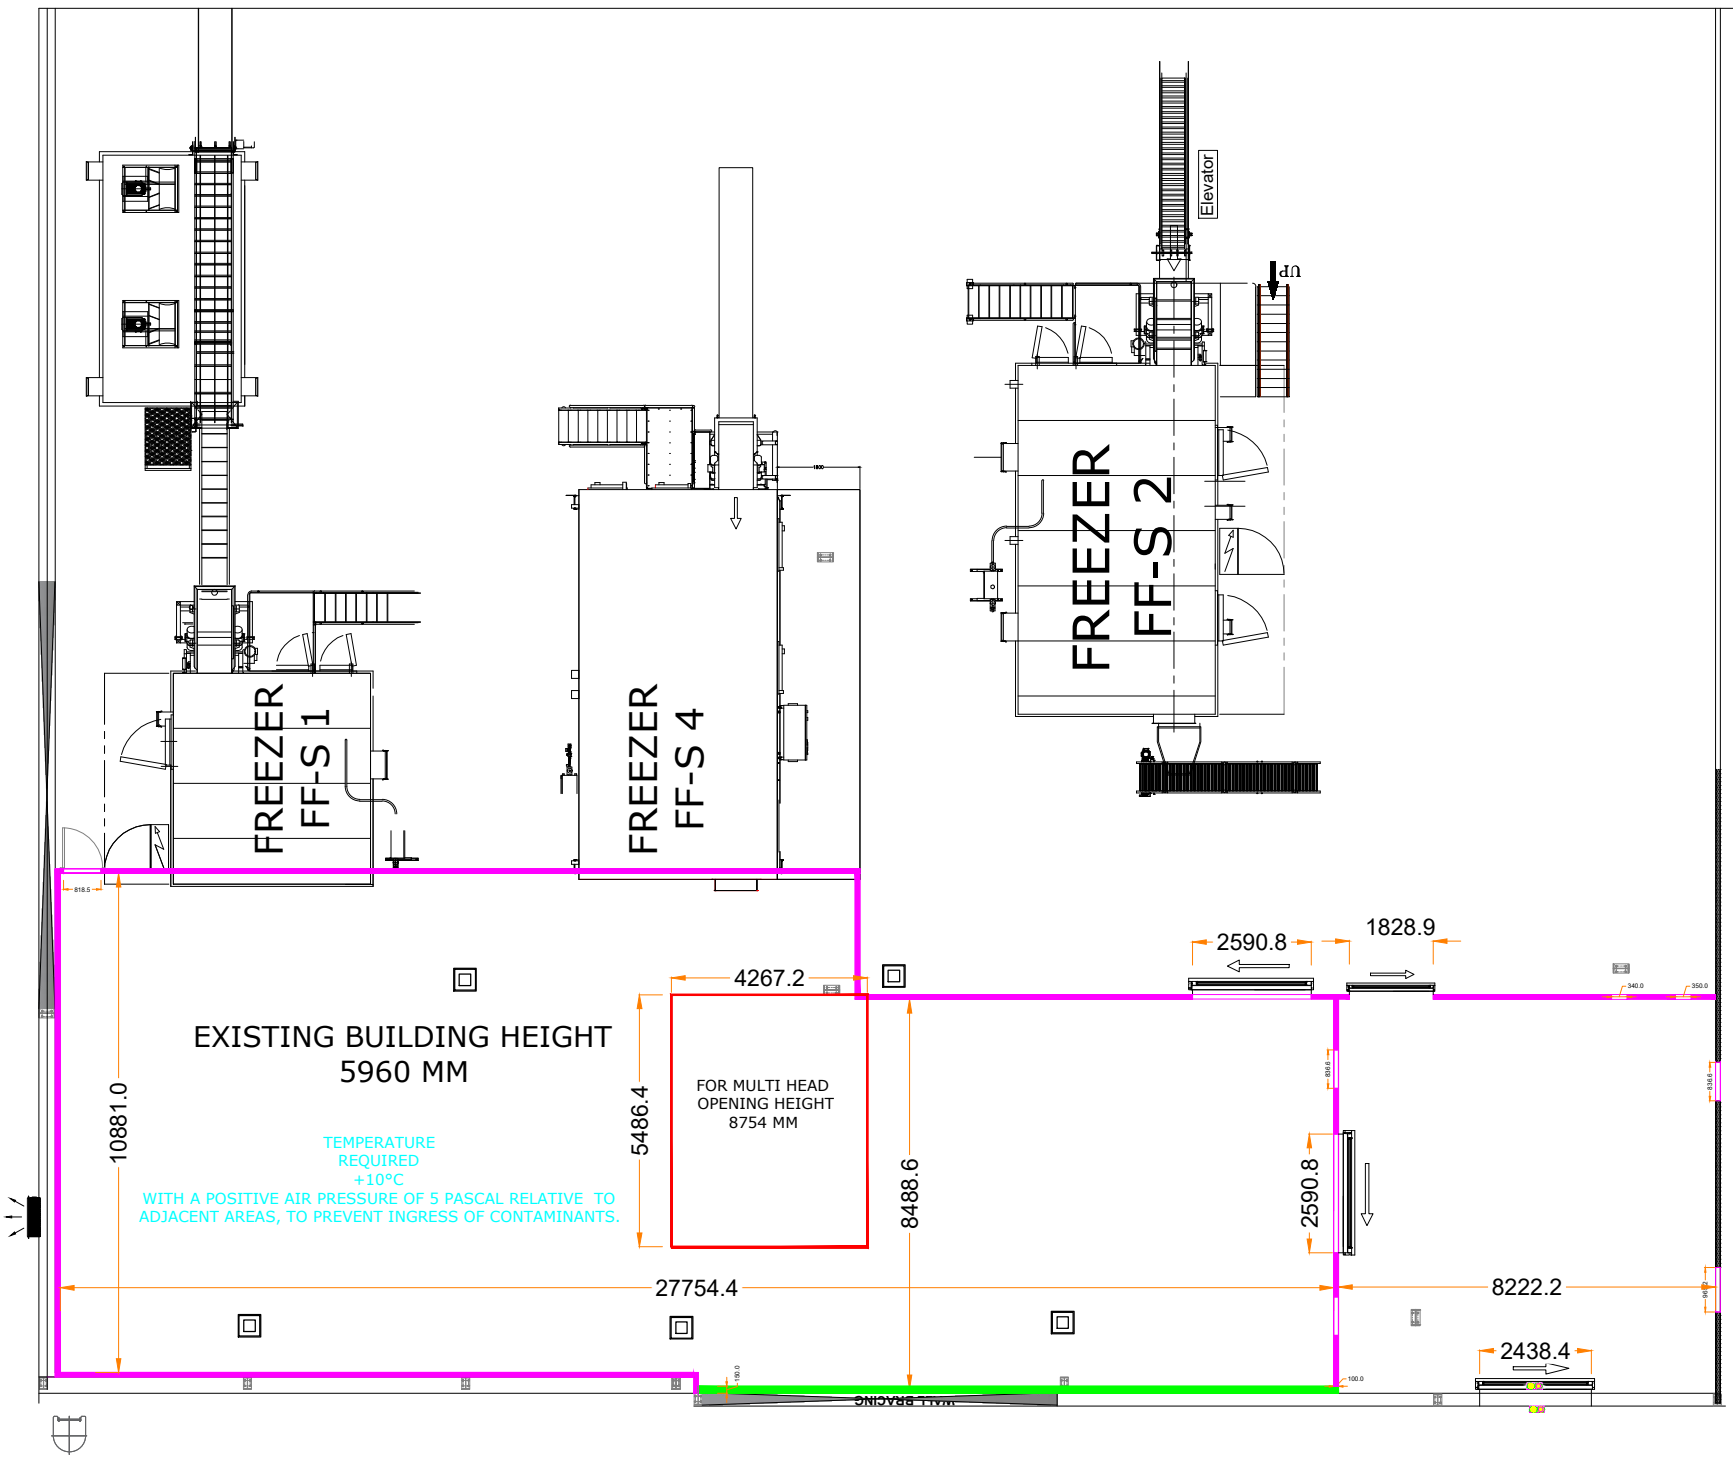

TOP VIEW

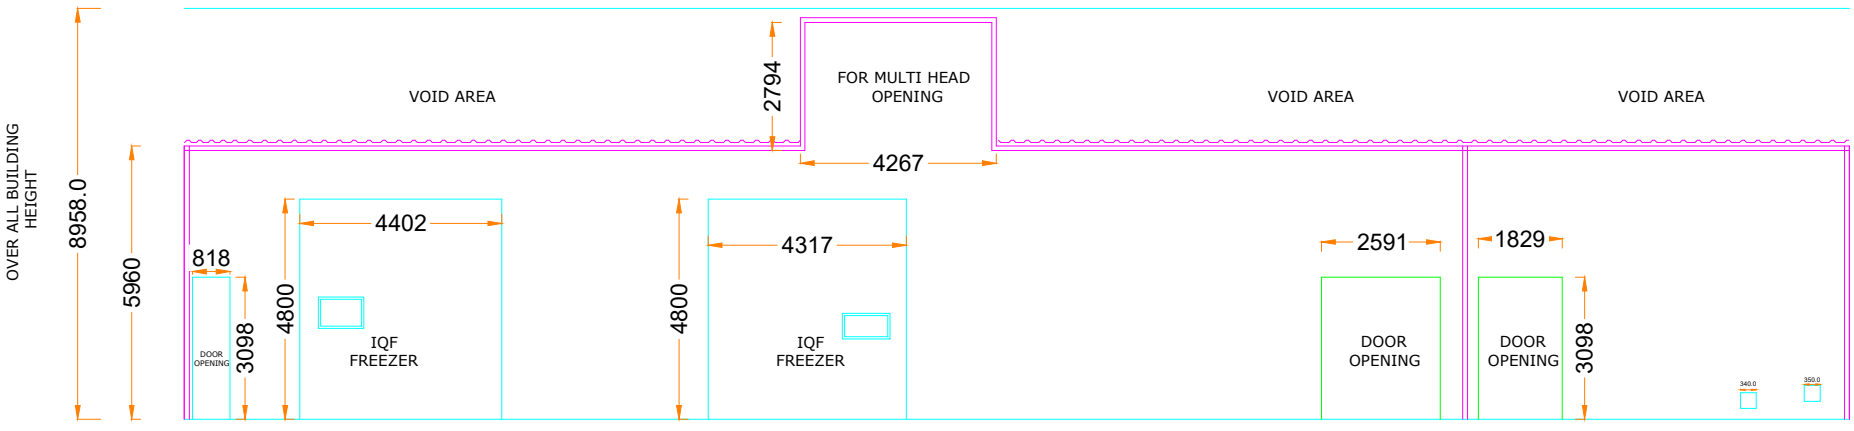

FRONT VIEW