

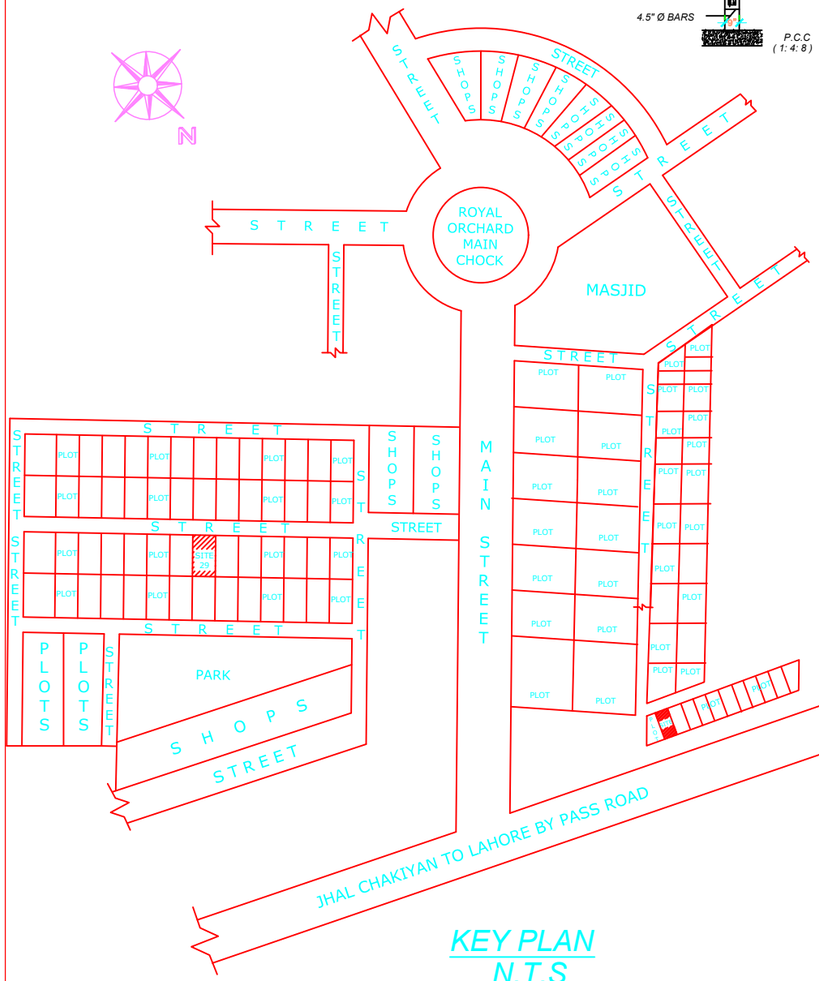



KEY PLAN
N.T.S

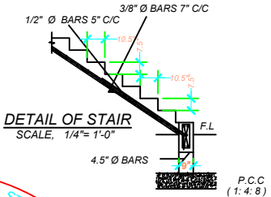


DETAIL OF STAIR
SCALE. 1/4"= 1'-0"

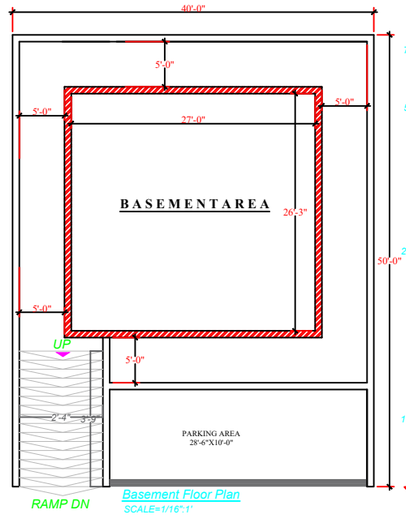

Basement Floor Plan
SCALE=1/16":1'

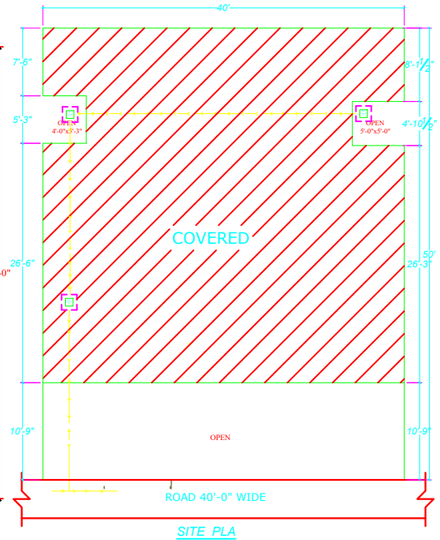

SITE PLA
SCALE=1/16":1'

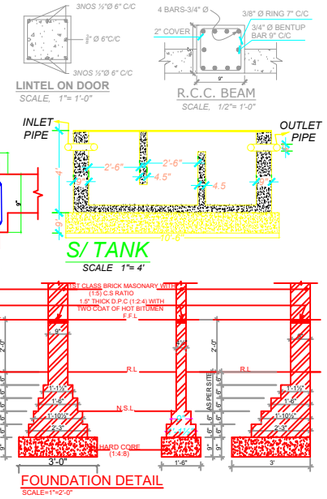

SPECIFICATION

FOUNDATION: 3"TH. SAND OVER 9" TH. P.C.C. (1:4:8)
D.P.C: 1½"TH. D.P.C. (1:2:4)
SUPER STURCTURE:
FIRST CLASS BRICK WORK OVER 2 COATS OF HOT BITUMAN OVER ONE LAYER OF POLY THENE SHEET.
ROOF: 1½" TILES. OVER 3" TH. MUD & MUD MORTOR. 2 COATS OF HOT BITUMAN WITH POLY THENE SHEET OVER 6" TH. R.C.C. SLAB. (1:2:4)
FLOOR: ½" TH. FLOOR FININSHING OVER 1½" P.C.C. (1:4:8) OVER 4" TH. BRICK BATS OVER 3" TH. SAND FILLING OVER EARTH FILLING.


SCHEDULE OF OPENING

S.NO.	TYPE	SIZE	DESCRIPTION
1.	D1	5'x7'	DOOR WOOD
2.	D2	3'-6"x7'	// // //
3.	D3	3'x7'	// // //
4.	D4	2'-6"x7'	// // //
5.	D/W	5'x10'	GLAZED DOOR& WINDOW
6.	D/W1	9'-6½"x8'	// // //
7.	D/W2	3'-6"x7'	// // //
8.	D/W3	3'-3"x6'	// // //
9.	W2	6'x5'	GLAZED WINDOW
10.	W3	5'x10'	// // //
11.	W4	4'x4'	// // //
12.	W5	5'x5'	// // //
13.	W6	8'x8'	// // //
14.	W7	12'-6"x6'	// // //
15.	V	2'x2'	GLAZED VENTILATION


SCHEDULE OF AREA

TOTAL AREA OF PLOT	= 2000 SFT
C/ AREA OF BASEMENT FLOOR	= 708 SFT
C/ AREA OF GROUND FLOOR	= 1517 SFT
C/ AREA OF FIRST FLOOR	= 1936 SFT
C/ AREA OF SECOND FLOOR	= 1936 SFT
C/ AREA OF THIRD FLOOR	= 1936 SFT
OPEN AREA OF G.F.	= 483 SFT


OWNER.

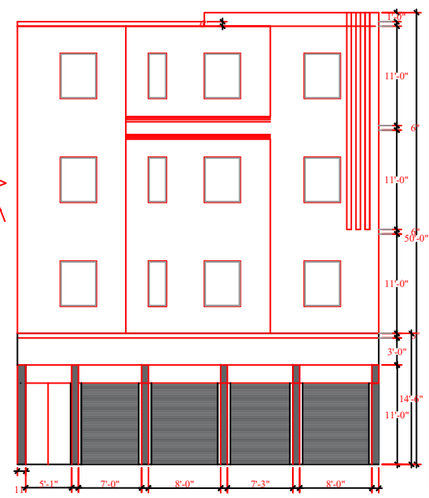

Front Elevation Plan
SCALE=1/16":1'

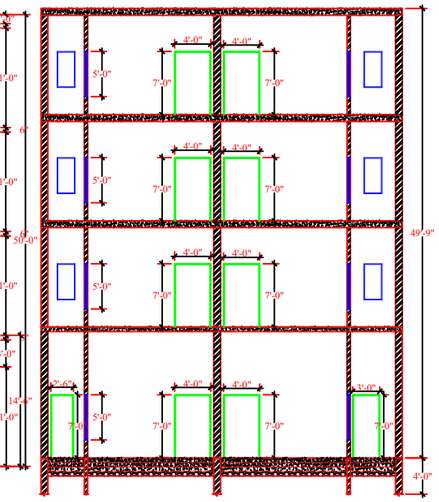

Front Elevation Detail Plan A-A
SCALE=1/16":1'

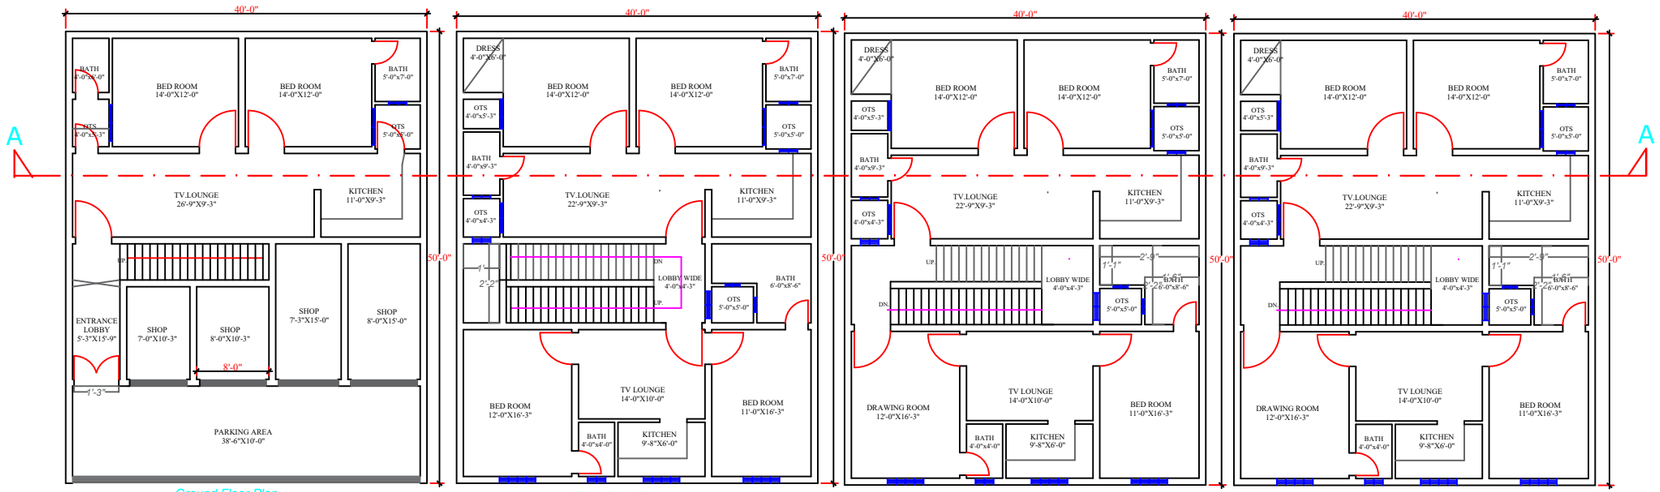

Ground Floor Plan
SCALE=1/16":1'

First Floor Plan
SCALE=1/16":1'

Second Floor Plan
SCALE=1/16":1'

Third Floor Plan
SCALE=1/16":1'